



## YDS-J4K-OV2732 V3.2 NIR

**2MP OmniVision OV2732 MIPI and DVP Parallel Interface No IR Filter  
Fixed Focus Camera Module**

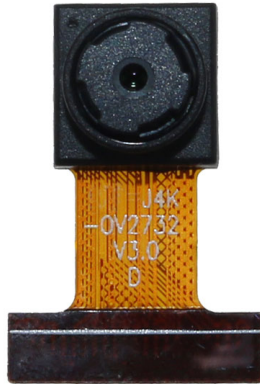

Front View

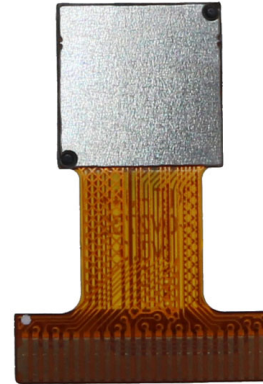

Back View

### Specifications

|                                 |                                     |
|---------------------------------|-------------------------------------|
| <b>Camera Module No.</b>        | <b>YDS-J4K-OV2732 V3.2 NIR</b>      |
| <b>Resolution</b>               | 2MP                                 |
| <b>Image Sensor</b>             | OV2732                              |
| <b>Sensor Type</b>              | 1/4"                                |
| <b>Pixel Size</b>               | 2.0 um x 2.0 um                     |
| <b>EFL</b>                      | 3.20 mm                             |
| <b>F.NO</b>                     | 2.80                                |
| <b>Pixel</b>                    | 1920 x 1080                         |
| <b>View Angle</b>               | 70.0°(DFOV) 58.6°(HFOV) 45.3°(VFOV) |
| <b>Lens Dimensions</b>          | 8.00 x 8.00 x 4.72 mm               |
| <b>Module Size</b>              | 18.50 x 12.50 mm                    |
| <b>Module Type</b>              | Fixed Focus                         |
| <b>Interface</b>                | MIPI and DVP Parallel               |
| <b>Auto Focus VCM Driver IC</b> | None                                |
| <b>Lens Model</b>               | YDS-LENS-M5182                      |
| <b>Lens Type</b>                | No IR Filter Lens                   |
| <b>Operating Temperature</b>    | -40°C to +85°C                      |
| <b>Mating Connector</b>         | FH12-24S-0.5SH                      |



## YDS-J4K-OV2732 V3.2 NIR

2MP OmniVision OV2732 MIPI and DVP Parallel Interface No IR Filter  
Fixed Focus Camera Module




Top View



Side View





Bottom View



Mating Connector


# ROHS

| NO | SIGNAL     |
|----|------------|
| 1  | FSIN       |
| 2  | AGND       |
| 3  | SIO D      |
| 4  | AVDD 2.8V  |
| 5  | SIO C      |
| 6  | RESET      |
| 7  | VSYNC      |
| 8  | PWDN       |
| 9  | HREF       |
| 10 | DVDD 1.2V  |
| 11 | DOVDD 1.8V |
| 12 | D9/MDN1    |
| 13 | MCLK       |
| 14 | D8/MDP1    |
| 15 | DGND       |
| 16 | D7/MCN     |
| 17 | PCLK       |
| 18 | D6/MCP     |
| 19 | D2         |
| 20 | D5/MDN0    |
| 21 | D3         |
| 22 | D4/MDP0    |
| 23 | D10        |
| 24 | D11        |

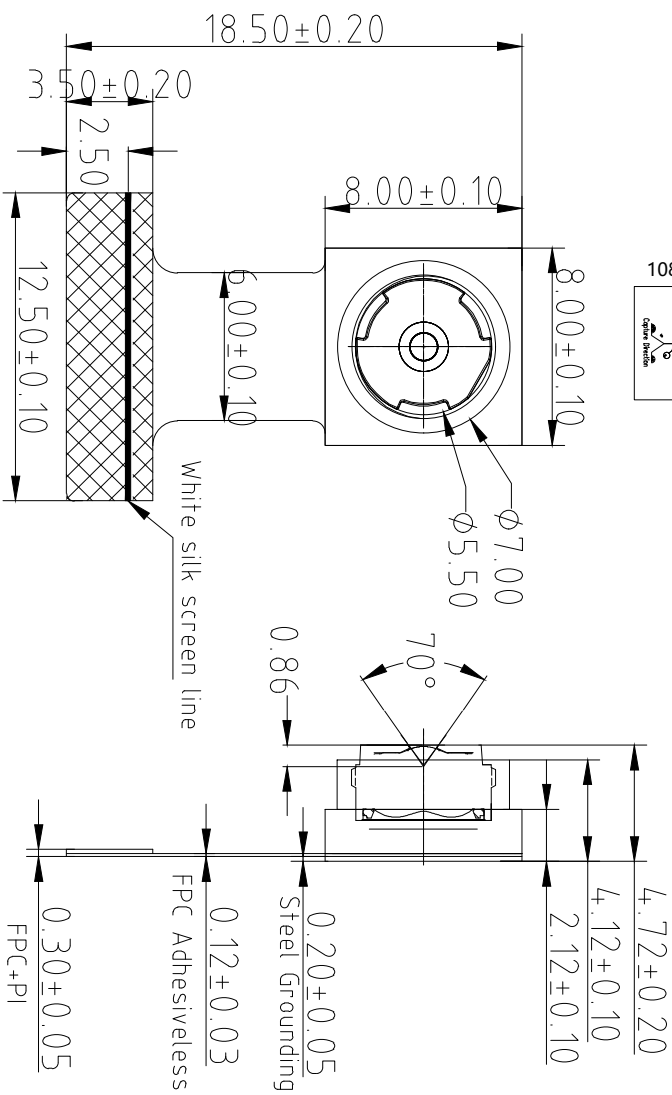

TOP VIEW

SIDE VIEW

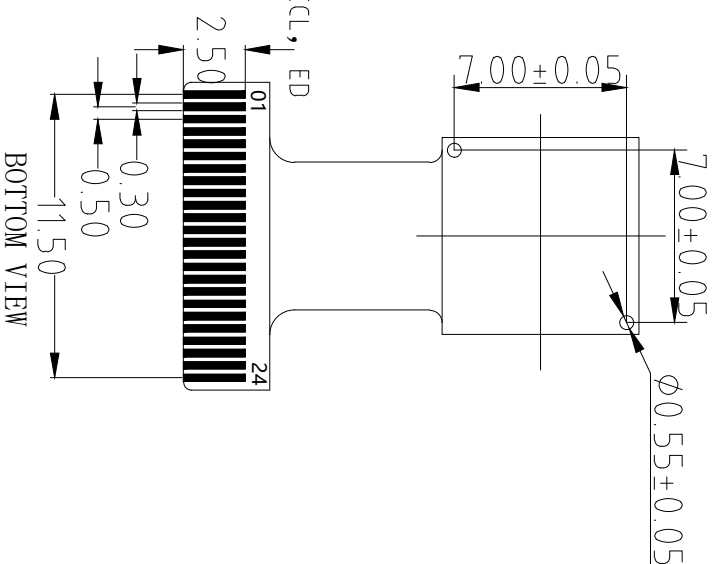

BOTTOM VIEW

NOTE:  
1.The device slave address:0x20(w);0x21(r)

## Parameters:

### 1、Sensor specification:


Image Sensor: OV2732  
Pixel: 2umx2um  
Lens Type: 1/4  
Important Voltage Description: DVDD1.2V (external power supply);

### 2、Lens specification:

FOV: 70°(D);58.6°(H);45.3°(V)  
F/NO.: 2.8  
TV distortion: <1.0%  
Focal length: 3.2mm  
Composition: 4P

| Version | Information                         | Date      |
|---------|-------------------------------------|-----------|
| V1.0    | First Version                       | 7-15-2017 |
| V3.0    | Change lens and holder,Add PIN FSIN | 4-17-2020 |
| V3.2    | Change lens                         | 9-26-2021 |

|             |           |                  |                     |
|-------------|-----------|------------------|---------------------|
| Designed By | Kevin     | Model Name:      | J4K-OV2732 V3.2 NIR |
| Checked By  | Aouly Yan | Projection Type: | Unit: mm            |
|             |           | Scale:           | 1:1                 |
|             |           | Sheet:           | 1 of 1              |
|             |           | Version:         | 1/0                 |



# OV2732 1080p product brief



## Low-Power 1080p High Definition PureCel® Sensor for Security Applications



available in  
a lead-free  
package

OmniVision's OV2732 is a compact and power-efficient PureCel® image sensor designed for IoT-based residential and commercial monitoring systems. The OV2732 captures quality images and videos with staggered high dynamic range (HDR), ensuring excellent scene reproduction in all lighting environments. The sensor features frame sync for use in multi-camera or 360-degree camera systems and supports ultra-low power mode (ULPM) and an ambient light sensor (ALS), making it particularly well-suited for battery-powered security applications.

Built on OmniVision's PureCel® technology, the 1/4-inch OV2732 captures 1080p high definition (HD) video at 60 frames per second (fps), 720p HD video at 90 fps, and VGA resolution video at 120 fps. The OV2732 delivers crisp images and video, even in challenging low-light conditions.

Find out more at [www.ovt.com](http://www.ovt.com).



## Applications

- Internet of Things (IoT)
- High-end Video Conferencing
- Security
- Lifestyle Camera
- Home Monitoring

## Product Features

- programmable controls:
  - gain
  - exposure
  - frame rate
  - image size
  - horizontal mirror
  - vertical flip
  - cropping
  - windowing
- automatic image control functions:
  - black level calibration (BLC)
- serial camera control bus (SCCB)
- defective pixel correction (DPC)
- digital video port (DVP) parallel output interface
- support for two lane MIPI interface (up to 800 Mbps)
- support for image sizes:
  - 1080p @ 60 fps
  - 720p @ 90 fps
  - VGA @ 120 fps
  - QVGA @ 240 fps, and more
- support for light sensing mode (LSM)
- support for staggered 2 frame HDR
- support for black sun cancellation
- on-chip phase lock loop (PLL)

# OV2732




## Ordering Information

- OV02732-H57A  
(color, lead-free, 57-pin CSP4)

## Product Specifications

- active array size: 1920 x 1080
- power supply:
  - core: 1.2V
  - analog: 2.8V
  - I/O: 1.8V
- power requirements:
  - active: 110 mW
- temperature range:
  - operating: -40°C to +85°C junction temperature
  - stable image: 0°C to +60°C junction temperature
- output interfaces:
  - two-lane MIPI / DVP parallel
- output formats: 10/12-bit RAW RGB
- lens size: 1/4"
- lens chief ray angle: 12° linear
- input clock frequency: 6 - 27 MHz
- scan mode: progressive
- maximum image transfer rate:
  - 1080p: 60 fps
  - 720p: 90 fps
  - VGA: 120 fps
  - QVGA: 240 fps
- shutter: rolling shutter
- maximum exposure interval: 1184 x t<sub>row</sub>
- pixel size: 2 μm x 2 μm
- image area: 3868 μm x 2190 μm
- package dimensions: 5174 μm x 3680 μm

## Functional Block Diagram

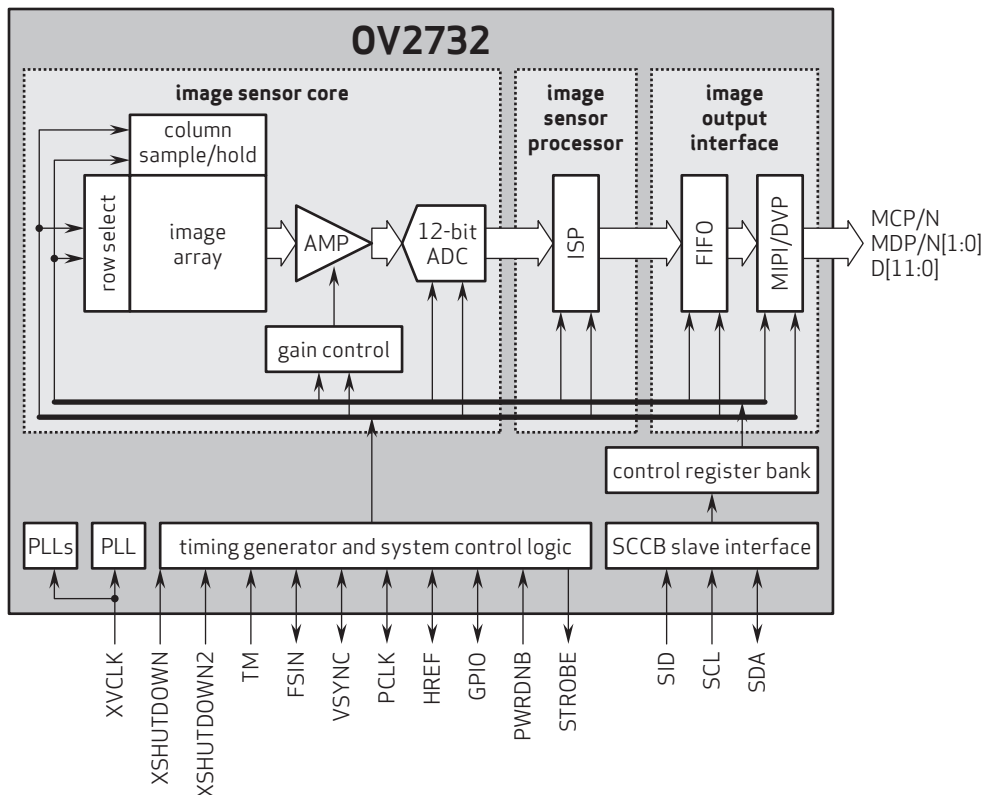

4275 Burton Drive  
Santa Clara, CA 95054  
USA

Tel: + 1 408 567 3000  
Fax: + 1 408 567 3001  
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo and OmniPixel are registered trademarks of OmniVision Technologies, Inc. OmniBSI-2 is a trademark of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



OmniVision



## YDS-LENS-M5182

| SPECIFICATION                         |  |
|---------------------------------------|--|
| 1. SENSOR SIZE                        | 1/4" (3M COB)                                      |
| 2. MAX IMAGE CIRCLE                   | $\phi 4.85\text{mm}$                               |
| 3. TOTAL TRACK                        | $4.0 \pm 0.1\text{mm}$                             |
| 4. EFL                                | 3.2mm  |
| 5. OPTICAL EFL                        | 1.32mm   |
| 6. MECHANICAL EFL                     | 0.95mm   |
| 7. F/NO                               | 2.8 = 5f   |
| 8. VIEW OR FIELD DIAGONAL             | 45.3° (Y=1.36)<br>58.6° (Y=1.81)<br>70.0° (Y=2.26) |
| 9. OPTICAL DISTORTION                 | <1.0%  |
| 10. TV DISTORTION                     | <1.0%  |
| 11. RELATIVE ILLUMINATION             | >42.2%   |
| 12. CONSTRUCTION                      | 4P   |
| 13. CHIEF RAY ANGLE                   | <25°   |
| 14. CUT FREQUENCY AT 50%              | \  |
| 15. THREAD                            | M6.0X0.35P   |
| 16. IMAGE QUALITY                     | AXIS 330lp/mm                                      |
| 17. APPEARANCE QUALITY (Scratch/Dirt) | CENTER 20/lc<br>EDGE 40/20                         |

| NO | MODIFY CONTENT              | NAME   | DATE       | ANGLE  | RANGE           | DIM    | UNIT        | SCALE  | APPROVED BY |
|----|-----------------------------|--------|------------|--------|-----------------|--------|-------------|--------|-------------|
| 1  | 新增规格书(4.30X795.50(CV:0.10)) | tonlin | 2016-12-05 | X, XXX | $\pm 0.5^\circ$ | X, XXX | $\pm 0.010$ | 10 : 1 | tonlin      |
|    |                             |        |            | X, XX  | $\pm 0.05$      | X, X   | $\pm 0.1$   |        |             |



  

**NOTE:**

- 镜头表面不可有油污、灰尘、毛丝等异物。
- 镜头配VCM锁附高度为  $4.2 \pm 0.1\text{mm}$ ，扭力为  $20 \sim 120\text{gf}\cdot\text{cm}$ 。
- 镜头承受推力为  $\geq 2.0\text{kg}$ 。
- 镜头组品质参数需符合图中要求。

# 0.5mm and 1mm Pitch Connectors For FPC/FFC

## FH12 Series

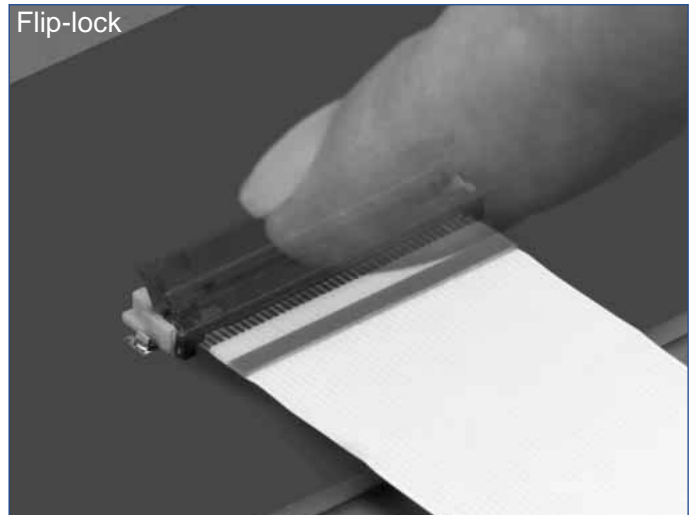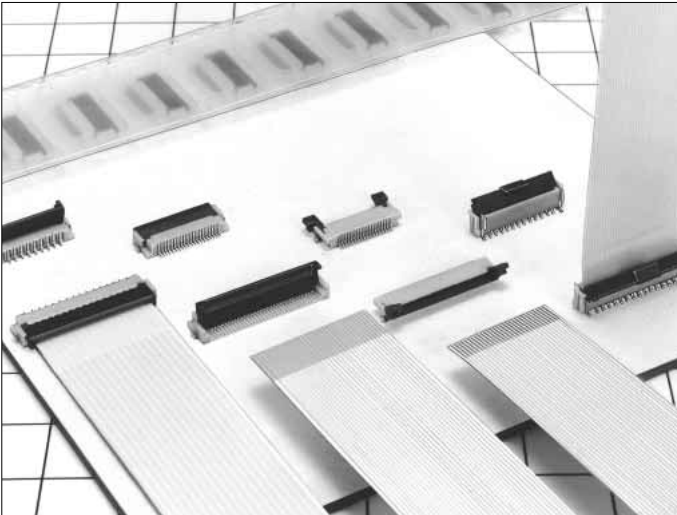

### ■ Features

#### 1. Ease of Use and Space Savings

Only one finger or 6.9N (Newtons) of force is required to lock Hirose's rotational actuator (flip-lock) as compared to using 2 fingers and 39.2N to close a FFC/FPC connector from our competition.

The Flip-Lock design also allows customers to place 2 or more connectors side by side as there is no need to waste additional board space for a side latch.

#### 2. Strengthened Flip-lock Actuator

The standard Flip-Lock requires only 2.0mm height above the board. A strengthened lock lever is available which only requires an additional 0.4mm.

#### 3. Supports Thin FPC (0.18mm)

Hirose does not require double-sided FPC to have any additional strengthening plate or stiffener and can therefore support a thickness of as little as 0.18mm +/- 0.05.

#### 4. Hirose Ensures Reliability

Hirose's patented half tuning fork contacts maintain the required normal force without relying on the connector housing. With our competitor's conventional products the housing walls support the contact force, which does not provide for long-term reliability.

#### 5. Prevention of Solder Bridge

Excess solder cavity absorbs excessive solder and avoids solder bridging.

#### 6. Three different assembly types


FH12 is offered in Top & Bottom Contact and Vertical Mount and offered in both a 0.5mm contact pitch as well as a 1.0mm contact pitch (bottom contact only).

### ■ Applications


Notebook computers, printers, PDAs, digital cameras and other compact devices for interconnecting the main circuit board with the LCD, HDD or other device.

#### Rotating One-touch Mechanism


①

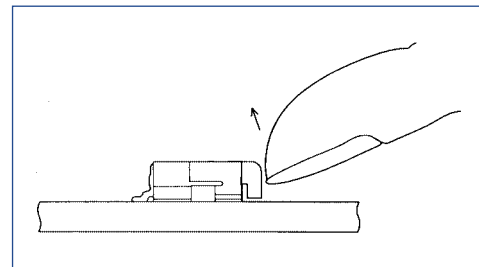

②

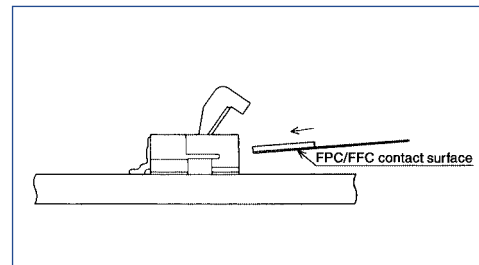

③

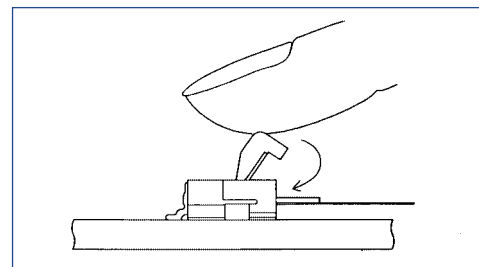

## Product Specifications

|        |                                 |  |  |
|--------|---------------------------------|--|--|
| Rating | Current rating: 0.5A DC(Note 1) | Operating Temperature Range: -40 to +70°C (Note 2)                   | Storage Temperature Range: -10 to +50°C (Note 3)                   |
|        | Voltage rating: 50V AC          | Operating Humidity Range: Relative humidity, 90% max.<br>(Not dewed) | Storage Humidity Range: Relative humidity, 90% max.<br>(Not dewed) |

|                |                        |                                  |
|----------------|------------------------|----------------------------------|
| Applicable FPC | t=0.3±0.05 Gold plated | t=0.18 ± 0.05 for FH12F-*S-0.5SH |
|----------------|------------------------|----------------------------------|

| Item                                 | Specification   | Conditions   |
|--------------------------------------|---|--|
| 1. Insulation resistance             | 500M ohms minimum   | 100V DC  |
| 2. Withstanding voltage              | No flashover or insulation breakdown.   | 150V AC/1 minute   |
| 3. Contact resistance                | 50m ohms maximum  | 1mA  |
| 4. Durability (Insertion/withdrawal) | Contact resistance: 50m ohms maximum<br>No damage, cracks, or parts dislocation.  | 20 cycles  |
| 5. Vibration                         | No electrical discontinuity of 1μs or more<br>Contact resistance: 50m ohms maximum.<br>No damage, cracks, or parts dislocation. | Frequency: 10 to 55 Hz, single amplitude of 0.75 mm,<br>2 hours in each of the 3 directions.                       |
| 6. Shock                             | No electrical discontinuity of 1μs or more<br>Contact resistance: 50m ohms maximum.<br>No damage, cracks, or parts dislocation. | Acceleration of 490 m/s <sup>2</sup> , 11 ms duration,<br>sine half-wave waveform, 3 cycles in each of the 3 axis. |
| 7. Humidity(Steady state)            | Contact resistance: 50m ohms maximum.<br>Insulation resistance: 50M ohms minimum.<br>No damage, cracks, or parts dislocation.   | 96 hours at 40°C and humidity of 90% to 95%  |
| 8. Temperature Cycle                 | Contact resistance: 50m ohms maximum.<br>Insulation resistance: 50M ohms minimum.<br>No damage, cracks, or parts dislocation.   | Temperature: -40°C → 15 to 35°C → 85°C → 15 to 35°C,<br>Time: 30 → 5 max. → 30 → 5 max.(minutes)<br>5 cycles       |
| 9. Resistance to Soldering heat      | No deformation of components affecting performance.   | Reflow: At the recommended temperature profile<br>Manual soldering: 350±5°C for 3 seconds                          |

Note 1: When passing the current through all of the contacts, use 70% of the current rating.

Note 2: Includes temperature rise caused by current flow.

Note 3: The term "storage" refers to products stored for long period of time prior to mounting and use. Operating Temperature Range and Humidity range covers nonconducting condition of installed connectors in storage, shipment or during transportation.

## Material

| Part           | Material                | Finish             | Remarks |
|----------------|-------------------------|--------------------|---------|
| Insulator      | Polyamide, LCP(60 pos.) | Color : Beige      | UL94V-0 |
| Actuator       | PPS                     | Color : Dark brown |         |
| Contact        | Phosphor bronze         | Gold plated        |         |
| Metal Fittings | Brass                   | Tin plated         |         |

## Ordering Information






**FH12**    **A** - **10** (**4**) - **S** **A** - **0.5** **SH** (**55**)  
 ①            ②            ③            ④            ⑤            ⑥            ⑦            ⑧            ⑨

|  |  |
|--|--|
| ① Series Name : FH12   | ⑤ Contact alignment: Single  |
| ② Blank : standard type<br>A : Top contact type<br>S : Type with strengthened flip-lock actuator<br>F : Type with 0.18mm FPC End Thickness | ⑥ Eccentric direction:<br>Blank : standard type<br>A : Eccentric type                  |
| ③ Standard type : Number of contacts<br>Eccentric type : Number of contacts in 0.5mm housing   | ⑦ Contacts Pitch : 0.5mm, 1mm  |
| ④ Standard type : Blank<br>Eccentric type : Number of contacts   | ⑧ Contact type<br>SH : SMT horizontal mounting type<br>SV : SMT vertical mounting type |
|  | ⑨ Plating specification<br>(55) : Gold plated  |






**FH12 Series 0.5mm and 1mm Pitch Connectors For FPC/FPC**

**Series Configuration**
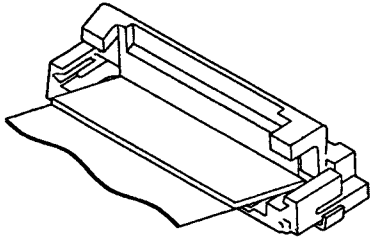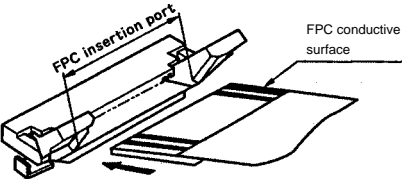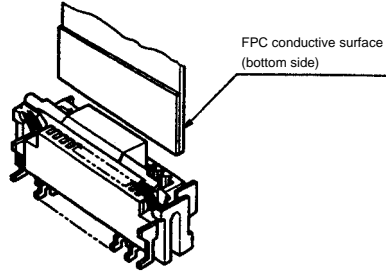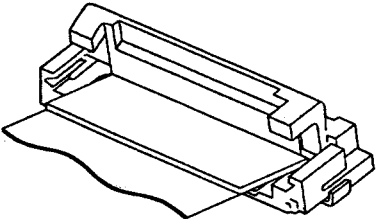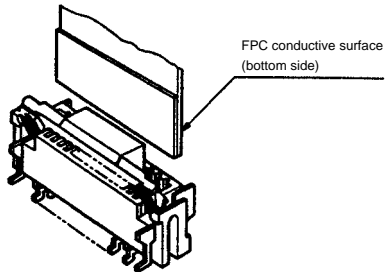
| Pitch | Bottom Contact Type  | Top Contact Type   | Vertical mounting Type   |
|-------|--|--|--|
| 0.5mm |  <p><b>FH12- ** S-0.5SH</b> <b>P.12</b><br/>                     Number of contacts 6, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 22, 24, 25, 26, 28, 30, 32, 33, 34, 35, 36, 40, 45, 50, 53</p>  |  |   |
|       | <p>Type with Strengthened Lock Lever</p>   |  |  |
|       | <p><b>FH12S- ** S-0.5SH</b> <b>P.13</b><br/>                     Number of contacts 30, 40, 45, 50, 53</p>   |  |  |
|       | <p>Type with 0.18mm FPC End Thickness</p>  |  |  |
|       | <p><b>FH12F- ** S-0.5SH</b> <b>P.14</b><br/>                     Number of contacts 6, 8, 10, 12, 13, 14, 15, 16, 18, 20, 22, 24, 25, 26, 28, 30, 32, 34, 36, 40</p>   |  |  |
| 1mm   |  <p>Standard <b>FH12- ** S-1SH</b> <b>P.18</b><br/>                     Eccentric <b>FH12- ** (***) SA-1SH</b><br/>                     Standard<br/>                     Number of contacts 5, 6, 7, 8, 9, 11, 12, 16, 17, 22, 26<br/>                     Eccentric<br/>                     Number of contacts 4, 6, 8, 10, 11, 14, 19, 24</p> |  |  <p><b>FH12- ** S-1SV</b> <b>P.19</b><br/>                     Number of contacts 6, 7, 8, 16, 20, 22, 24</p> |

## 0.5mm Pitch Bottom Contact Type

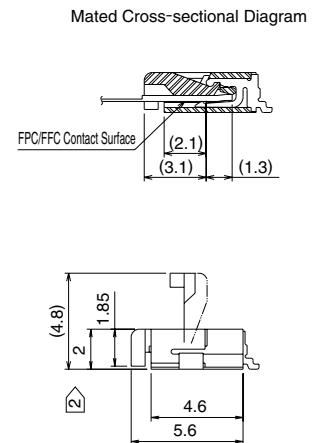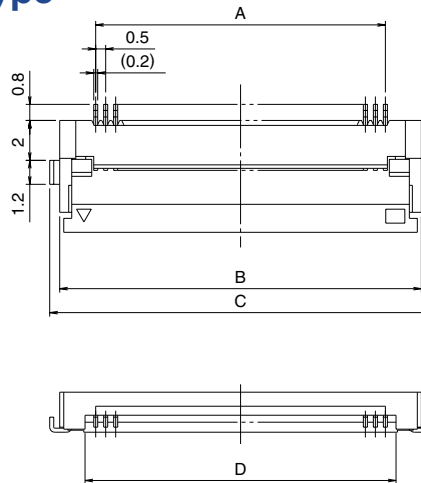

Unit:mm

| Part Number               | CL No.        | Number of Contacts | A    | B    | C    | D     | RoHS |
|---------------------------|---------------|--------------------|------|------|------|-------|------|
| FH12- 6S-0.5SH(55)        | 586-0582-5-55 | 6                  | 2.5  | 6.1  | 7.1  | 3.57  | YES  |
| FH12- 8S-0.5SH(55)        | 586-0744-5-55 | 8                  | 3.5  | 7.1  | 8.1  | 4.57  |      |
| FH12-10S-0.5SH(55)        | 586-0522-3-55 | 10                 | 4.5  | 8.1  | 9.1  | 5.57  |      |
| FH12-11S-0.5SH(55)        | 586-0600-5-55 | 11                 | 5    | 8.6  | 9.6  | 6.07  |      |
| FH12-12S-0.5SH(55)        | 586-0704-0-55 | 12                 | 5.5  | 9.1  | 10.1 | 6.57  |      |
| FH12-13S-0.5SH(55)        | 586-0549-0-55 | 13                 | 6    | 9.6  | 10.6 | 7.07  |      |
| FH12-14S-0.5SH(55)        | 586-0533-0-55 | 14                 | 6.5  | 10.1 | 11.1 | 7.57  |      |
| FH12-15S-0.5SH(55)        | 586-0523-6-55 | 15                 | 7    | 10.6 | 11.6 | 8.07  |      |
| FH12-16S-0.5SH(55)        | 586-0531-4-55 | 16                 | 7.5  | 11.1 | 12.1 | 8.57  |      |
| FH12-17S-0.5SH(55)        | 586-0606-1-55 | 17                 | 8    | 11.6 | 12.6 | 9.07  |      |
| FH12-18S-0.5SH(55)        | 586-0530-1-55 | 18                 | 8.5  | 12.1 | 13.1 | 9.57  |      |
| FH12-19S-0.5SH(55)        | 586-0534-2-55 | 19                 | 9    | 12.6 | 13.6 | 10.07 |      |
| FH12-20S-0.5SH(55)        | 586-0524-9-55 | 20                 | 9.5  | 13.1 | 14.1 | 10.57 |      |
| FH12-22S-0.5SH(55)        | 586-0532-7-55 | 22                 | 10.5 | 14.1 | 15.1 | 11.57 |      |
| FH12-24S-0.5SH(55)        | 586-0521-0-55 | 24                 | 11.5 | 15.1 | 16.1 | 12.57 |      |
| FH12-25S-0.5SH(55)        | 586-0692-3-55 | 25                 | 12   | 15.6 | 16.6 | 13.07 |      |
| FH12-26S-0.5SH(55)        | 586-0576-2-55 | 26                 | 12.5 | 16.1 | 17.1 | 13.57 |      |
| FH12-28S-0.5SH(55)        | 586-0612-4-55 | 28                 | 13.5 | 17.1 | 18.1 | 14.57 |      |
| Note ② FH12-30S-0.5SH(55) | 586-0525-1-55 | 30                 | 14.5 | 18.1 | 19.1 | 15.57 |      |
| FH12-32S-0.5SH(55)        | 586-0681-7-55 | 32                 | 15.5 | 19.1 | 20.1 | 16.57 |      |
| FH12-33S-0.5SH(55)        | 586-0520-8-55 | 33                 | 16   | 19.6 | 20.6 | 17.07 |      |
| FH12-34S-0.5SH(55)        | 586-0617-8-55 | 34                 | 16.5 | 20.1 | 21.1 | 17.57 |      |
| FH12-35S-0.5SH(55)        | 586-0740-4-55 | 35                 | 17.0 | 20.6 | 21.6 | 18.07 |      |
| FH12-36S-0.5SH(55)        | 586-0526-4-55 | 36                 | 17.5 | 21.1 | 22.1 | 18.57 |      |
| Note ② FH12-40S-0.5SH(55) | 586-0527-7-55 | 40                 | 19.5 | 23.1 | 24.1 | 20.57 |      |
| Note ② FH12-45S-0.5SH(55) | 586-0528-0-55 | 45                 | 22   | 25.6 | 26.6 | 23.07 |      |
| Note ② FH12-50S-0.5SH(55) | 586-0529-2-55 | 50                 | 24.5 | 28.1 | 29.1 | 25.57 |      |
| Note ② FH12-53S-0.5SH(55) | 586-0595-7-55 | 53                 | 26   | 29.6 | 30.6 | 27.07 |      |

Note 1 : Embossed tape reel packaging (2,000 pieces/reel).  
 Order by number of reels.

Note ② : If there is no problem with the connector height, we recommend the type with the strengthened Flip-lock actuator (FH12S-\*S-0.5SH).  
 Standard type connector height: 2 mm  
 Connector height of type with strengthened Flip-lock actuator: 2.4 mm



# YDS CAMERA MODULE

*your best camera partner*

## Camera Module Pinout Definition Reference Chart

| OmniVision                    | Sony | Samsung   | On-Semi | Aptina | Himax | GalaxyCore | PixArt | SmartSens | Sensors |
|-------------------------------|------|---|---------|--------|-------|------------|--------|-----------|---------|
| Pin Signal                    |      | Description   |         |        |       |            |        |           |         |
| DGND GND                      |      | ground for digital circuit                              |         |        |       |            |        |           |         |
| AGND                          |      | ground for analog circuit                               |         |        |       |            |        |           |         |
| PCLK DCK                      |      | DVP PCLK output   |         |        |       |            |        |           |         |
| XCLR PWDN XSHUTDOWN STANDBY   |      | power down active high with internal pull-down resistor |         |        |       |            |        |           |         |
| MCLK XVCLK XCLK INCK          |      | system input clock                                      |         |        |       |            |        |           |         |
| RESET RST                     |      | reset active low with internal pull-up resistor         |         |        |       |            |        |           |         |
| NC NULL                       |      | no connect  |         |        |       |            |        |           |         |
| SDA SIO_D SIOD                |      | SCCB data   |         |        |       |            |        |           |         |
| SCL SIO_C SIOC                |      | SCCB input clock  |         |        |       |            |        |           |         |
| VSYNC XVS FSYNC               |      | DVP VSYNC output  |         |        |       |            |        |           |         |
| HREF XHS                      |      | DVP HREF output   |         |        |       |            |        |           |         |
| DOVDD                         |      | power for I/O circuit                                   |         |        |       |            |        |           |         |
| AFVDD                         |      | power for VCM circuit                                   |         |        |       |            |        |           |         |
| AVDD                          |      | power for analog circuit                                |         |        |       |            |        |           |         |
| DVDD                          |      | power for digital circuit                               |         |        |       |            |        |           |         |
| STROBE FSTROBE                |      | strobe output   |         |        |       |            |        |           |         |
| FSIN                          |      | synchronize the VSYNC signal from the other sensor      |         |        |       |            |        |           |         |
| SID                           |      | SCCB last bit ID input                                  |         |        |       |            |        |           |         |
| ILPWM                         |      | mechanical shutter output indicator                     |         |        |       |            |        |           |         |
| FREQ                          |      | frame exposure / mechanical shutter                     |         |        |       |            |        |           |         |
| GPIO                          |      | general purpose inputs                                  |         |        |       |            |        |           |         |
| SLASEL                        |      | I2C slave address select                                |         |        |       |            |        |           |         |
| AFEN                          |      | CEN chip enable active high on VCM driver IC            |         |        |       |            |        |           |         |
| <b>MIPI Interface</b>         |      |   |         |        |       |            |        |           |         |
| MDN0 DN0 MD0N DATA_N DMO1N    |      | MIPI 1st data lane negative output                      |         |        |       |            |        |           |         |
| MDP0 DP0 MD0P DATA_P DMO1P    |      | MIPI 1st data lane positive output                      |         |        |       |            |        |           |         |
| MDN1 DN1 MD1N DATA2_N DMO2N   |      | MIPI 2nd data lane negative output                      |         |        |       |            |        |           |         |
| MDP1 DP1 MD1P DATA2_P DMO2P   |      | MIPI 2nd data lane positive output                      |         |        |       |            |        |           |         |
| MDN2 DN2 MD2N DATA3_N DMO3N   |      | MIPI 3rd data lane negative output                      |         |        |       |            |        |           |         |
| MDP2 DP2 MD2P DATA3_P DMO3P   |      | MIPI 3rd data lane positive output                      |         |        |       |            |        |           |         |
| MDN3 DN3 MD3N DATA4_N DMO4N   |      | MIPI 4th data lane negative output                      |         |        |       |            |        |           |         |
| MDP3 DP3 MD3P DATA4_P DMO4P   |      | MIPI 4th data lane positive output                      |         |        |       |            |        |           |         |
| MCN CLKN CLK_N DCKN           |      | MIPI clock negative output                              |         |        |       |            |        |           |         |
| MCP CLKP MCP CLK_P DCKN       |      | MIPI clock positive output                              |         |        |       |            |        |           |         |
| <b>DVP Parallel Interface</b> |      |   |         |        |       |            |        |           |         |
| D0 DO0 Y0                     |      | DVP data output port 0                                  |         |        |       |            |        |           |         |
| D1 DO1 Y1                     |      | DVP data output port 1                                  |         |        |       |            |        |           |         |
| D2 DO2 Y2                     |      | DVP data output port 2                                  |         |        |       |            |        |           |         |
| D3 DO3 Y3                     |      | DVP data output port 3                                  |         |        |       |            |        |           |         |
| D4 DO4 Y4                     |      | DVP data output port 4                                  |         |        |       |            |        |           |         |
| D5 DO5 Y5                     |      | DVP data output port 5                                  |         |        |       |            |        |           |         |
| D6 DO6 Y6                     |      | DVP data output port 6                                  |         |        |       |            |        |           |         |
| D7 DO7 Y7                     |      | DVP data output port 7                                  |         |        |       |            |        |           |         |
| D8 DO8 Y8                     |      | DVP data output port 8                                  |         |        |       |            |        |           |         |
| D9 DO9 Y9                     |      | DVP data output port 9                                  |         |        |       |            |        |           |         |
| D10 DO10 Y10                  |      | DVP data output port 10                                 |         |        |       |            |        |           |         |
| D11 DO11 Y11                  |      | DVP data output port 11                                 |         |        |       |            |        |           |         |

[www.YDSCAM.com](http://www.YDSCAM.com) [sales@ydscam.com](mailto:sales@ydscam.com) Phone (WeChat, QQ): (+86) 177 2732 6718

All rights reserved @ YingDeShun Co. Ltd. Specifications subject to change without notice.



## Cameras Applications



### IMAGING DEVICES



## Camera Reliability Test

| Reliability Inspection Item |                             | Testing Method  | Acceptance Criteria     |                         |
|-----------------------------|-----------------------------|---|-------------------------|-------------------------|
| Category                    | Item                        |   |                         |                         |
| Environmental               | Storage Temperature         | High 60°C 96 Hours  | Temperature Chamber     | No Abnormal Situation   |
|                             |                             | Low -20°C 96 Hours  | Temperature Chamber     | No Abnormal Situation   |
|                             | Operation Temperature       | High 60°C 24 Hours  | Temperature Chamber     | No Abnormal Situation   |
|                             |                             | Low -20°C 24 Hours  | Temperature Chamber     | No Abnormal Situation   |
|                             | Humidity                    | 60°C 80% 24 Hours   | Temperature Chamber     | No Abnormal Situation   |
|                             | Thermal Shock               | High 60°C 0.5 Hours<br>Low -20°C 0.5 Hours<br>Cycling in 24 Hours | Temperature Chamber     | No Abnormal Situation   |
| Physical                    | Drop Test (Free Falling)    | Without Package 60cm  | 10 Times on Wood Floor  | Electrically Functional |
|                             |                             | With Package 60cm   | 10 Times on Wood Floor  | Electrically Functional |
|                             | Vibration Test              | 50Hz X-Axis 2mm 30min   | Vibration Table         | Electrically Functional |
|                             |                             | 50Hz Y-Axis 2mm 30min   | Vibration Table         | Electrically Functional |
|                             |                             | 50Hz Z-Axis 2mm 30min   | Vibration Table         | Electrically Functional |
|                             | Cable Tensile Strength Test | Loading Weight 4 kg<br>60 Seconds<br>Cycling in 24 Hours          | Tensile Testing Machine | Electrically Functional |
| Electrical                  | ESD Test                    | Contact Discharge 2 KV  | ESD Testing Machine     | Electrically Functional |
|                             |                             | Air Discharge 4 KV  | ESD Testing Machine     | Electrically Functional |
|                             | Aging Test                  | On/Off 30 Seconds<br>Cycling in 24 Hours                          | Power Switch            | Electrically Functional |
|                             | USB Connector               | On/Off 250 Times  | Plug and Unplug         | Electrically Functional |





## Camera Inspection Standard

| Inspection Item  |          | Inspection Method | Standard of Inspection      |  |                                 |
|------------------|----------|-------------------|-----------------------------|--|---------------------------------|
| Category         | Item     |                   |                             |  |                                 |
| Appearance       | FPC/ PCB | Color             | The Naked Eye               | Major Difference is Not Allowed.           |                                 |
|                  |          | Be Torn/Chopped   | The Naked Eye               | Copper Crack Exposure is Not Allowed.      |                                 |
|                  |          | Marking           | The Naked Eye               | Clear, Recognizable (Within 30cm Distance) |                                 |
|                  | Holder   | Scratches         | The Naked Eye               | The Inside Crack Exposure is Not Allowed   |                                 |
|                  |          | Gap               | The Naked Eye               | Meet the Height Standard                   |                                 |
|                  |          | Screw             | The Naked Eye               | Make Sure Screws Are Presented (If Any)    |                                 |
|                  |          | Damage            | The Naked Eye               | The Inside Crack Exposure is Not Allowed   |                                 |
|                  | Lens     | Scratch           | The Naked Eye               | No Effect On Resolution Standard           |                                 |
|                  |          | Contamination     | The Naked Eye               | No Effect On Resolution Standard           |                                 |
|                  |          | Oil Film          | The Naked Eye               | No Effect On Resolution Standard           |                                 |
|                  |          | Cover Tape        | The Naked Eye               | No Issue On Appearance.                    |                                 |
|                  | Function | Image             | No Communication            | Test Board                                 | Not Allowed                     |
|                  |          |                   | Bright Pixel                | Black Board                                | Not Allowed In the Image Center |
| Dark Pixel       |          |                   | White board                 | Not Allowed In the Image Center            |                                 |
| Blurry           |          |                   | The Naked Eye               | Not Allowed                                |                                 |
| No Image         |          |                   | The Naked Eye               | Not Allowed                                |                                 |
| Vertical Line    |          |                   | The Naked Eye               | Not Allowed                                |                                 |
| Horizontal Line  |          |                   | The Naked Eye               | Not Allowed                                |                                 |
| Light Leakage    |          |                   | The Naked Eye               | Not Allowed                                |                                 |
| Blinking Image   |          |                   | The Naked Eye               | Not Allowed                                |                                 |
| Bruise           |          |                   | Inspection Jig              | Not Allowed                                |                                 |
| Resolution       |          |                   | Chart                       | Follows Outgoing Inspection Chart Standard |                                 |
| Color            |          |                   | The Naked Eye               | No Issue                                   |                                 |
| Noise            |          |                   | The Naked Eye               | Not Allowed                                |                                 |
| Corner Dark      |          |                   | The Naked Eye               | Less Than 100px By 100px                   |                                 |
| Color Resolution |          |                   | The Naked Eye               | No Issue                                   |                                 |
| Dimension        | Height   | The Naked Eye     | Follows Approval Data Sheet |  |                                 |
|                  | Width    | The Naked Eye     | Follows Approval Data Sheet |  |                                 |
|                  | Length   | The Naked Eye     | Follows Approval Data Sheet |  |                                 |
|                  | Overall  | The Naked Eye     | Follows Approval Data Sheet |  |                                 |

## YDSCAM Package Solutions

YDS Camera Module



Complete with Lens Protection Film



Tray with Grid and Space




Place Cameras on the Tray




## YDSCAM Package Solutions

Full Tray of Cameras

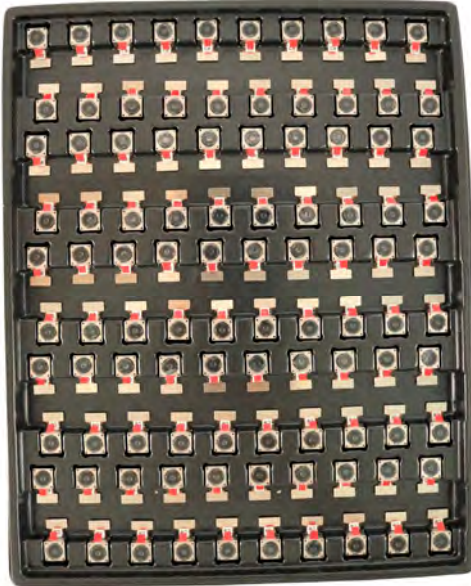

Cover Tray with Lid

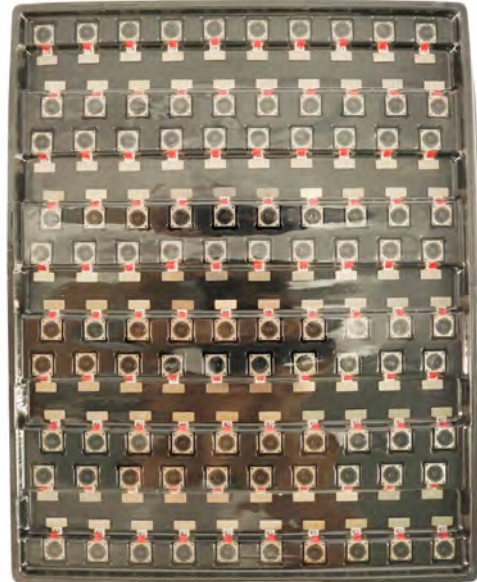

Place Tray into Anti-Static Bag



Vacuum the Anti-Static Bag





## YDSCAM Package Solutions

### Sealed Vacuum Anti-Static Bag with Labels

1. Model and Description 2. Quantity 3. Manufacturing Date Code 4. Caution



## YDSCAM Package Solutions

Place Foam Sheets Between Tray Bags



Foam Sheets are Larger Than Trays



Place Foam Sheets and Trays into Box



Foam Sheets are Tightly Fitting in Box



Seal the Carbon Box



Label the Carbon Shipping Box







## YDSCAM Package Solutions

USB Camera Module

Complete with Lens Protection Film



Place Camera Sample into Anti-Static Bag

Place USB Cameras into Tray



Seal the Tray with Anti-Static Bag

Label the Carbon Shipping Box



## YDSCAM Package Solutions

Place Camera Sample into Anti-Static Bag



Place Connectors into Anti-Static Bag



Label the Sample Bags



Place Connectors into Reel



Place Samples into the Carbon Box



Place Connectors into the Carbon Box







# YDS CAMERA MODULE

*your best camera partner*

## Company YDSCAM

YingDeShun Co. Ltd. (YDS) was established in 2017, a next-generation technology driven manufacturer specialized in research, design, and produce of audio and video products. YDS is occupying 20,000 square feet automated plants with 100 employees of annual throughput 30,000,000 units cameras.

YDS provides OEM, ODM design, contract manufacturing, and builds the camera products. You may provide the requirements to us, even with a hand draft, our sales and engineering work together to meet your needs. We consider ourselves your last-term partner in developing practical and innovative solutions.

Our team covers everything from initial concept development to mass produced product. YDS specializes in customized camera design, raw material, electronic engineering, firmware/software development, product testing, and packing design. Our experienced strategic supply systems offer a robust and dependable manufacturing capacity for orders of various sizes.



## Limited Warranty

YDS provides the following limited warranty if you purchased the Product(s) directly from YDS company or from YDS's website [www.YDSCAM.com](http://www.YDSCAM.com). Product(s) purchased from other sellers or sources are not covered by this Limited Warranty. YDS guarantees that the Product(s) will be free from defects in materials and workmanship under normal use for a period of one (1) year from the date you receive the product ("Warranty Period").

For all Product(s) that contain or develop material defects in materials or workmanship during the Warranty Period, YDS will, at its sole option, either: (i) repair the Product(s); (ii) replace the Product(s) with a new or refurbished Product(s) (replacement Product(s) being of identical model or functional equivalent); or (iii) provide you a refund of the price you paid for the Product(s).

This Limited Warranty of YDS is solely limited to repair and/or replacement on the terms set forth above. YDS is not reliable or responsible for any subsequent events.



[www.YDSCAM.com](http://www.YDSCAM.com) [sales@ydscom.com](mailto:sales@ydscom.com) Phone (WeChat, QQ): (+86) 177 2732 6718

All rights reserved @ YingDeShun Co. Ltd. Specifications subject to change without notice.





# YDS CAMERA MODULE

*your best camera partner*

## YDS Strength

### Powerful Factory



### Professional Service



### Promised Delivery



[www.YDSCAM.com](http://www.YDSCAM.com) [sales@ydscam.com](mailto:sales@ydscam.com) Phone (WeChat, QQ): (+86) 177 2732 6718

All rights reserved @ YingDeShun Co. Ltd. Specifications subject to change without notice.